

Product Change Notification

Document No

PCN-A-1050520

Revision

1.0

PCN Topic: Change the screw type and electric current of FM08/10 docking COM port

Introduction:

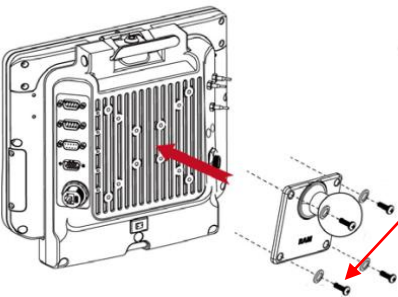

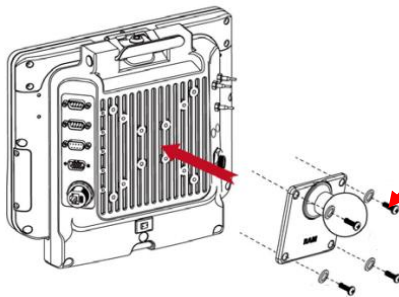

1. Change the screw type and length of Mounting Kit(no drill) from Big Flat Screw (M5 x 8mm) to Hex Socket Cap Screw (M5 x 12mm).
2. The electric current of FM08/FM10' COM port has been changed.

Details:

To maintain consistently high quality in our product, we announce to our customers that we have changed the following two items:

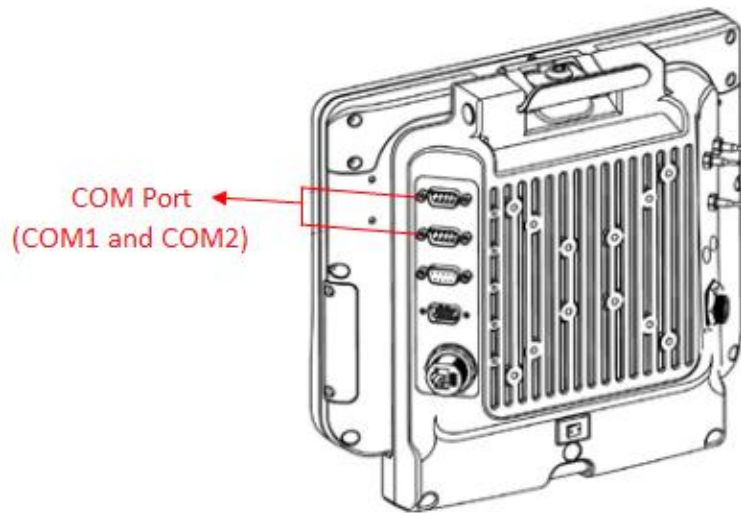
1. To screw the FM08/10 and docking on the vehicle tightly and make the machine more stable when the vehicle is moving, we change the screw type and length of the no drill mounting kits from Big Flat Screw (M5 x 8mm) to Hex Socket Cap Screw (M5 x 12mm).

Please check the comparison table below:

Original screws on the mounting kit (no drill)		NEW screws on the mounting kit (no drill)	
			
	Big Flat Screw (M5 x 8mm)		Hex Socket Cap Screw (M5 x 12mm)
	Part No: 913511101G0S		Part No: 913511101149

2. To support more devices to be used on our Vehicle Mounted Computer, we change our electrical current of FM08/10 docking COM ports (COM1 and COM2) from 0.2A to 1A.

Please check the following table:



	Original	New
Voltage of COM Port (COM1 and COM2)	5V	5V
Electric Current of COM Port (COM1 and COM2)	0.2A	1A

Change Date:

05-20-2016

Will be effective from May-20-2016

Issued by: Bill Yeh

APPROVE:

[Handwritten Signature]
MD:

EE:

TE:

PE: