

GesTek

律安科技股份有限公司

台北縣林口鄉嘉寶村寶斗厝坑3號

Global EMC Standard Tech. Corp.

Tel : 886-2-2603-5321 Fax: 886-2-2603-5325

No.3, Pau-Tou-Tsuo Valley, Chia-Pau Tsuen, Lin Kou Hsiang, Taipei County, Taiwan, R.O.C.

Declaration Of Revising Report Version

TO: WinMate Communication Inc.

EUT : 10.4 " Multimedia LCD Touch Monitor

Model Number: R10TXXX-XXXXXX, R10LXXX-XXXXXX (X=A~Z, a~z,
0~9, Blank or Slash)


GesTek Report : 0505057

Report Type: FCC

Due to market requirement, the report is modified as revision 2 and modified product name and model numbers. The report number: 0505057 Rev. 1, we issued before is invalid.

Date : November 21, 2005

Approved By: _____



Tonny Lin General Manager

Certificate of Test

May 2005

WinMate Communication Inc.

Product Type : 10.4 " Multimedia LCD Touch Monitor
Model Number : R10TXXX-XXXXXX, R10LXXX-XXXXXX
(X=A~Z, a~z, 0~9, Blank or Slash)
Brand Name : WinMate
Test Report Number : GTK-0505057
Date of Test : May 09, 2005 – May 26, 2005

This Product was tested to the following standards at the laboratory of Global EMC Standard Tech. Corp., and found Compliance.

Standards:

CFR 47, Part 15 / CISPR 22 3rd Edition: 1997, Class B
ANSI C63.4: 2003
Canadian ICES-003

<http://www.gestek.com.tw>



Sharon Chang, President

GesTek EMC Lab

N0. 3, Pau-Tou-Tsuo Valley, Chia-Pau Tsuen,
Lin Kou Hsiang, Taipei County, Taiwan, R.O.C.
TEL:886-2-2603-5321
FAX:886-2-2603-5325

Date: May 31, 2005



1082
ILAC MRA



DECLARATION OF CONFORMITY

Per FCC Part 2 Section 2. 1077(a)



hereby declares that the product

Product Name: 10.4 " Multimedia LCD Touch Monitor

Model Number: R10TXXX-XXXXXX, R10LXXX-XXXXXX (X=A~Z, a~z, 0~9, Blank or Slash)

Conforms to the following specifications:

CISPR 22, Subpart B, Section 15.107(a) and Section 15.109(a),
Class B Digital Device

Supplementary Information:

This device complies with part 15 & CISPR 22 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Representative Person's Name : _____

Signature : _____

Date : _____



**Test Report
Application for
Declaration of Conformity
On Behalf Of**

WinMate Communication Inc.

EUT: 10.4 " Multimedia LCD Touch Monitor

**Model Number: R10TXXX-XXXXXX, R10LXXX-XXXXXX (X=A~Z, a~z, 0~9,
Blank or Slash)**

Prepared for:

WinMate Communication Inc.

9F, No. 111-6, Shing-De Rd., San-Chung City, Taipei 241, Taiwan, R.O.C.

**Report By : Global EMC Standard Tech. Corp.
No.3 Pau-Tou-Tsuo Valley, Chia-Pau
Tsuen, Lin Kou Hsiang, Taipei County,
Taiwan, R.O.C.
Tel : 886-2-2603-5321
Fax : 886-2-2603-5325**

Test results given in this report only relate to the specimen(s) tested, calibrated or measured.
This report shall not be reproduced other than in full without the written consent of Gestek.
This report must not be used to claim product endorsement by any agency of the U.S. Government.
All data in this report are traceable to national standard or international standard.

TABLE OF CONTENTS

	DESCRIPTION	PAGE
1.	CERTIFICATION	3
2.	SUMMARY OF TEST RESULTS	4
3.	GENERAL INFORMATION	5
3.1	PRODUCTION DESCRIPTION.....	5
3.2	TEST MODES & EUT COMPONENTS DESCRIPTION	5
3.3	CONFIGURATION OF THE TESTED SYSTEM	6
3.4	TEST METHODOLOGY	7
3.5	TEST FACILITY.....	7
4.	CONDUCTED EMISSION MEASUREMENT	8
4.1	TEST EQUIPMENTS.....	8
4.2	BLOCK DIAGRAM OF TEST SETUP	8
4.3	CONDUCTED EMISSION LIMIT	9
4.4	EUT CONFIGURATION ON MEASUREMENT	9
4.5	CONDUCTED EMISSION DATA	9
4.6	OPERATING CONDITIONS OF THE EUT.....	10
4.7	CONDUCTED EMISSION MEASUREMENT RESULTS.....	11
5.	RADIATED EMISSION MEASUREMENT	13
5.1	TEST EQUIPMENT	13
5.2	TEST SETUP	13
5.3	OPEN TEST SITE SETUP DIAGRAM	14
5.4	RADIATED EMISSION LIMIT.....	14
5.5	EUT CONFIGURATION	15
5.6	OPERATING CONDITION OF EUT	15
5.7	RADIATED EMISSION DATA	15
5.8	RADIATED EMISSIONS MEASUREMENT RESULTS	16
6.	PHOTOGRAPHS FOR TEST	18
6.1	TEST PHOTOGRAPHS FOR CONDUCTION.....	18
6.2	TEST PHOTOGRAPHS FOR RADIATED.....	19
7.	PHOTOGRAPHS FOR PRODUCT	20
8.	EMI REDUCTION METHOD DURING COMPLIANCE TESTING	22

1. CERTIFICATION

Applicant : **WinMate Communication Inc.**
 EUT Description : 10.4 " Multimedia LCD Touch Monitor
 Model Number : R10TXXX-XXXXXX, R10LXXX-XXXXXX (X=A~Z, a~z, 0~9,
 Blank or Slash)
 Brand Name : WinMate
 Serial Number : N/A
 Tested Power Supply : 120Vac/60Hz

MEASUREMENT PROCEDURES USED:

- CFR 47, Part 15** Radio Frequency Device Subpart B Unintentional Radiators Class B
- CISPR 22 3rd Edition:1997** Limits and methods of measurement of radio disturbance Characteristics of information technology equipment: 1997
- ANSI C63.4** Methods of Measurements of Radio-Noise Emissions from Low- Voltage Electrical and Electronic Equipment in the range of 9kHz To 40GHz:2003
- Canadian ICES-003** Implementation and Interpretation off the Interference-Causing Equipment Standard for Digital Apparatus, ICES-003

THE MEASUREMENT SHOWN IN THE ATTACHMENT WAS MADE IN ACCORDANCE WITH THE PROCEDURES INDICATED, AND THE MAXIMUM ENERGY EMITTED BY THE EQUIPMENT WAS FOUND TO BE WITHIN THE ABOVE LIMITS APPLICABLE.



Sample Received Date : May 09, 2005
 Final Test Date : May 26, 2005

In order to ensure the quality and accuracy of this document, the contents have been thoroughly reviewed by the following qualified personnel from GesTek Lab.

Documented By : <i>Rini Chen</i> _____ Rini Chen / adm. Dept. Supervisor	Administrative Reviewed By : <i>Rini Chen</i> _____ Rini Chen / adm. Dept. Supervisor
Technical Reviewed By : <i>Kevin Jiang</i> _____ Kevin Jiang / eng. Dept. Engineer	Approved By : <i>Tony Lin</i> _____ Tony Lin / General Manager

This test data shown below is traceable to National or international standard such as NIST/USA, etc. The laboratory's NVLAP accreditation in no way constitutes or implies product certification, approval, or endorsement by NVLAP or the United States government.

2. SUMMARY OF TEST RESULTS

The Worst Emission data was found as following

STANDARD	TEST ITEM	TEST RESULT	REMARKS
(1)FCC Part 15 (2)CISPR 22 3 rd Edition:1997	Conducted emission (Mode 1)	PASS	The worst emission frequency is <u>1.1206</u> MHz. And minimum passing margin is <u>-9.43</u> dB.
(3)Canadian ICES-003. Class B	Radiated emission (Mode 1)	PASS	The worst emission frequency is <u>144.5000</u> MHz at <u>Horizontal</u> . And minimum passing margin is <u>-4.81</u> dB. Height of antenna is <u>1.0</u> M. Angle of turntable is <u>120°</u> .

3. GENERAL INFORMATION

3.1 PRODUCTION DESCRIPTION

Product Name : 10.4 " Multimedia LCD Touch Monitor
Model Number : R10TXXX-XXXXXX, R10LXXX-XXXXXX (X=A~Z, a~z, 0~9, Blank or Slash)
Brand Name : WinMate
Serial Number : N/A
Applicant : WinMate Communication Inc.
Address : 9F, No. 111-6, Shing-De Rd., San-Chung City, Taipei 241, Taiwan, R.O.C.
Manufacturer : WinMate Communication Inc.
Address : 9F, No. 111-6, Shing-De Rd., San-Chung City, Taipei 241, Taiwan, R.O.C.
Power Supply : AC Input: 100-240V, 50-60Hz, 100-160VA
 Output: +12Vdc, 4.0A
Power Cord : 3pins, Detachable, 1.8m, Non-shielded

3.2 TEST MODES & EUT COMPONENTS DESCRIPTION

Test Mode	EUT: 10.4 " Multimedia LCD Touch Monitor
	Mode 1
Mother Board	WinMate, M/N: R8X

Note:

1. According to pre-scan data, we determine the data shown in this test report, which Reflects the worst-case data for each operation mode.
2. The EUT has series model numbers, because of the requirement of marketing.

3.3 CONFIGURATION OF THE TESTED SYSTEM

The FCC IDs/Types for all equipment, plus descriptions of all cables used in the tested system (including inserted cards, which have grants) are:

Device	No.	Configuration
Modem	M03-010	Manufacturer : ACEEX Model Number : 1414 Serial Number : 960018043 BSMI ID : N/A FCC ID : IFAXDM1414 Data Cable : Type:RS232, Shielded, Detachable, 1.2m Power Cord : Non-Shielded, Detachable, 1.5m Line : Type:RJ11(4P2C), Detachable, 1.8m Phone : Type:RJ11(4P2C), Detachable, 1.8m
PS2 Keyboard	K01-093	Manufacturer : IBM Model Number : SK-8811 Serial Number : 01979618 BSMI ID : 3902B330 FCC ID : N/A Data Cable : Shielded, Undetachable, 1.8 m
PS2 Mouse	M02-309	Manufacturer : IBM Model Number : MU29J Serial Number : 23021308 BSMI ID : 3902A581 FCC ID : N/A Data Cable : Shielded, Undetachable, 1.5m
Printer	P01-025	Manufacturer : Hewlett Packard Model Number : 2225C Serial Number : 2510S40471 BSMI ID : 3892A957 FCC ID : BS46XU2225C Data Cable : Shielded, Detachable, 1.2m, Parallel Cable Power Cord : Non-Shielded, Detachable, 1.8m
PC System	HP PC06	Model Number : Pavilion a000 BSMI ID : R33001 Serial Number : TWL410000F C.P.U : AMD Athlon XP 2400+ DDR : infineon PC2700 256M *2 DDR333 FDD : MITSUMI M/N:D353M3D BSMI ID:D63119 H.D.D. : Manufacturer :SAMSUNG M/N:SV041IN 40G BSMI ID:D33475 DVD-ROM : Manufacturer :PHILIPS M/N:DR0M6016/4A BSMI ID:D43002 Mother Board : ASUS, M/N:A7V8X-LA BSMI ID:D33005 S.P.S : HIPRO, M/N:HP-D2537F3H Input:100-127V /6 A, 200-240V/ 4A, 47~63 Hz Output:+5V/22A,-12V/0.8A,+12V/14A,+3.3V/18A +5VSB/2A BSMI ID:D33036

3.4 TEST METHODOLOGY


Both conducted and radiated testing were performed according to the procedures in ANSI C63.4-2003.

Radiated testing was performed at an antenna to EUT distance of 10 meters.

(For frequencies below 1000MHz)

3.5 TEST FACILITY

Ambient conditions in the laboratory:

ITEMS	REQUIORED(IEC 68-1)	ACTUAL
TEMPERATURE (°C)	15-35	24-27
HUMIDITY (%RH)	25-75	50-65
BAROMETRIC PRESSURE (mbar)	860-1060	950-1000
FCC SITE DESCRIPTION	Aug. 10, 1995 /Aug. 25, 1998 File on FCC Engineering Laboratory Federal Communication Commission 7435 Oakland Mills Road Columbia, MD 21046 Reference 31040/SIT1300F2	
NVLAP LAB. CODE	200085-0 United States Department of commerce National Institute of Standards and Technology National Voluntary Laboratory Accreditation Program Accreditation on NVLAP effective through Sep. 30,2005 For CISPR 22, FCC Method and AS/NZS CISPR 22 Measurement.	
Chinese National Laboratory Accreditation Certificate R.O.C.  1082 ILAC MRA	Recognized by the Council of Chinese National Laboratory Accreditation and confirmed to meet the requirements of ISO/IEC 17025 also has been registered for fifteen items, and meet the requirements of the Article 4 of Measures Governing the Recognition both Approval of Designated Laboratory for Commodities Inspection and has been registered for four items within the field of Electrical Testing. Registration No.: 1082 Registration on CNLA effective through April 30, 2006.	

4. CONDUCTED EMISSION MEASUREMENT


4.1 TEST EQUIPMENTS

The following test equipment are used during the conducted power line tests:

Item	Instrument	Manufacturer	Model	Serial No.	Last Cal. Date
1	Test Receiver	R & S	ESHS30	828109/010	01/20/05
2	L.I.S.N.(EUT)	ROLF HEINE	NNB-2/16Z	98091	12/08/04
3	L.I.S.N.(AE)	ROLF HEINE	NNB-2/16Z	99042	12/17/04
4	Pulse Limiter	R & S	ESH3-Z2	357.8810.52	08/06/04
5	RF CABLE	GTK	N/A	GTK-E-A154-01	12/01/04
6	50 Ohm Terminator	GTK	N/A	GTK-E-A130-01	10/09/04
7	Shielded Room	GTK	N/A	B5	N/A

Note: All measurement critical items of test instrumentation were within their calibration period of 1 year.

4.2 BLOCK DIAGRAM OF TEST SETUP

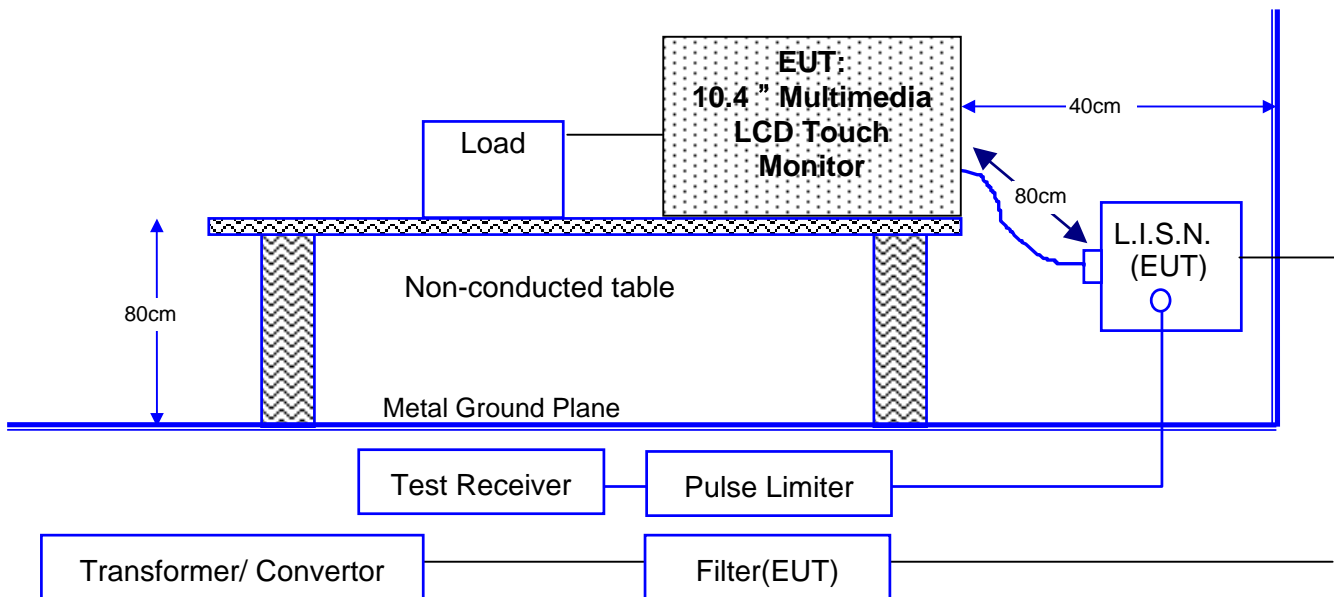

Note: This is a comprehensive setup diagram for Table-top EUT.

For Floor-standing EUT, the table will be removed with all others setup condition remain the same.

4.3 CONDUCTED EMISSION LIMIT

FCC Limit

Frequency	Maximum RF Line Voltage			
	Class A		Class B	
MHz	μV	$dB\mu V$	μV	$dB\mu V$
0.45 to 1.705	1000	60.0	250	48.0
1.705 to 30	3000	69.5	250	48.0

Remarks : 1. RF Line Voltage ($dB\mu V$) = 20 log RF Line Voltage (μV).
 2. In the Above Table, the tighter limit applies at the band edges.

CISPR Limit

Frequency	Maximum RF Line Voltage $dB(\mu V)$			
	Class A		Class B	
MHz	QUASI-PEAK	AVERAGE	QUASI-PEAK	AVERAGE
0.15 to 0.50	79	66	66 to 56	56 to 46
0.50 to 5.0	73	60	56	46
5.0 to 30	73	60	60	50

Remarks : In the Above Table, the tighter limit applies at the band edges.

4.4 EUT CONFIGURATION ON MEASUREMENT

The equipments that are listed 4.1 are installed on Conducted Power Line Test to meet the Commission requirement and operating in a manner, which tends to maximize its emission characteristics in a normal application.

The device under test, installed in a representative system as described in section 4.2, was placed on a non-conductive table whose total height equal to 80cm. Powered from one L.I.S.N. which signal output to receiver, and the other peripherals was powered from another L.I.S.N. which signal output was terminated by 50 Ω .

4.5 CONDUCTED EMISSION DATA

The measurement range of conducted emission, which is from **0.15 MHz to 30 MHz**, was investigated. All readings are quasi-peak and average values with a resolution Bandwidth of 9 KHz. The initial step in collecting conducted data is a spectrum analyzer peak scan of the measurement range for all the test modes. Then the worst modes were reported the following data pages.

4.6 OPERATING CONDITIONS OF THE EUT

The EUT exercise program used during conducted testing was designed to exercise the EUT in a manner similar to a typical use. The exercise sequence is listed as below:

1. Setup the EUT and simulators as shown on 4.2.
2. Turn on the power of all equipments.
3. Boot the P.C. from Hard Disk and setup the video to windows XP OS, active all devices.
4. Adjust to appropriate video resolution.
5. Active other internal devices such as network function.
6. Run "EMC " test program under windows XP OS.
7. P.C. sent "H" pattern to monitor, make the "H" pattern full in the screen.
8. P.C. sent "H" pattern to parallel and serial port.
9. Repeat above steps.

4.7 CONDUCTED EMISSION MEASUREMENT RESULTS

Date of Test	May 26, 2005	Temperature	23
EUT	10.4 " Multimedia LCD Touch Monitor	Humidity	59 %
Test Mode	Mode 1	Display Pattern	H Pattern


Line

No.	Frequency MHz	Reading Level dBμV	Factor dB	Measurement dBμV	Limit dBμV	Over Limit dB	Detector
1	0.1969	39.39	10.06	49.45	63.74	-14.29	QP
2	0.1969	29.06	10.06	39.12	53.74	-14.62	AVG
3	0.2626	33.51	10.08	43.59	61.35	-17.76	QP
4	0.2626	23.72	10.08	33.8	51.35	-17.55	AVG
5	0.659	25.05	10.14	35.19	56	-20.81	QP
6	0.659	24.03	10.14	34.17	46	-11.83	AVG
7	0.9892	26.34	10.09	36.43	56	-19.57	QP
8	0.9892	25.9	10.09	35.99	46	-10.01	AVG
9	1.122	25.59	10.09	35.68	56	-20.32	QP
10	1.122	24.84	10.09	34.93	46	-11.07	AVG
11	1.4518	25.17	10.1	35.27	56	-20.73	QP
12	1.4518	24.63	10.1	34.73	46	-11.27	AVG

Remarks :

- 1 All readings are Quasi-peak and Average values.
- 2 " " means that this data is the worse case emission level.

Line

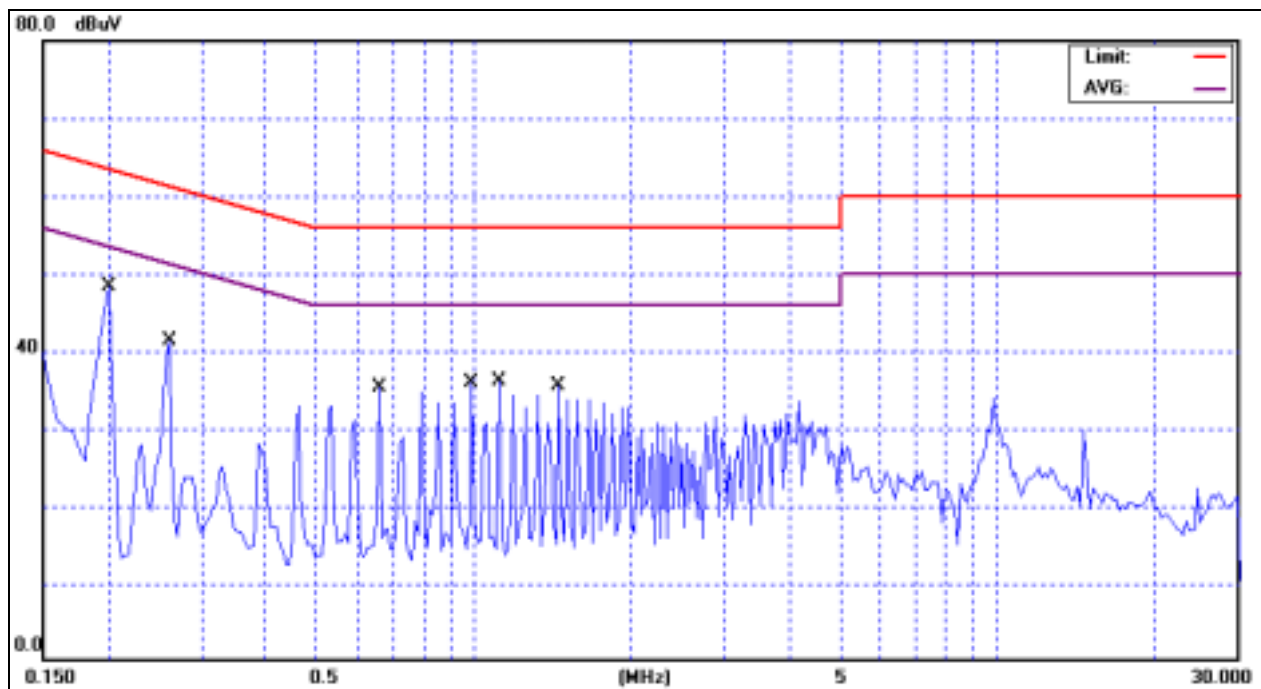

Date of Test	May 26, 2005	Temperature	23
EUT	10.4 " Multimedia LCD Touch Monitor	Humidity	59 %
Test Mode	Mode 1	Display Pattern	H Pattern


Neutral

No.	Frequency MHz	Reading Level dB μ V	Factor dB	Measurement dB μ V	Limit dB μ V	Over Limit dB	Detector
1	0.1974	39.36	10.06	49.42	63.72	-14.3	QP
2	0.1974	29.24	10.06	39.3	53.72	-14.42	AVG
3	0.792	26.29	10.12	36.41	56	-19.59	QP
4	0.792	25.91	10.12	36.03	46	-9.97	AVG
5	0.9908	25.49	10.09	35.58	56	-20.42	QP
6	0.9908	24.89	10.09	34.98	46	-11.02	AVG
7	1.1206	26.77	10.09	36.86	56	-19.14	QP
8	1.1206	26.48	10.09	36.57	46	-9.43	AVG
9	1.3203	24.38	10.1	34.48	56	-21.52	QP
10	1.3203	23.63	10.1	33.73	46	-12.27	AVG
11	1.4508	26.2	10.1	36.3	56	-19.7	QP
12	1.4508	26.16	10.1	36.26	46	-9.74	AVG

Remarks :

- 1 All readings are Quasi-peak and Average values.
- 2 " " means that this data is the worse case emission level.

Neutral

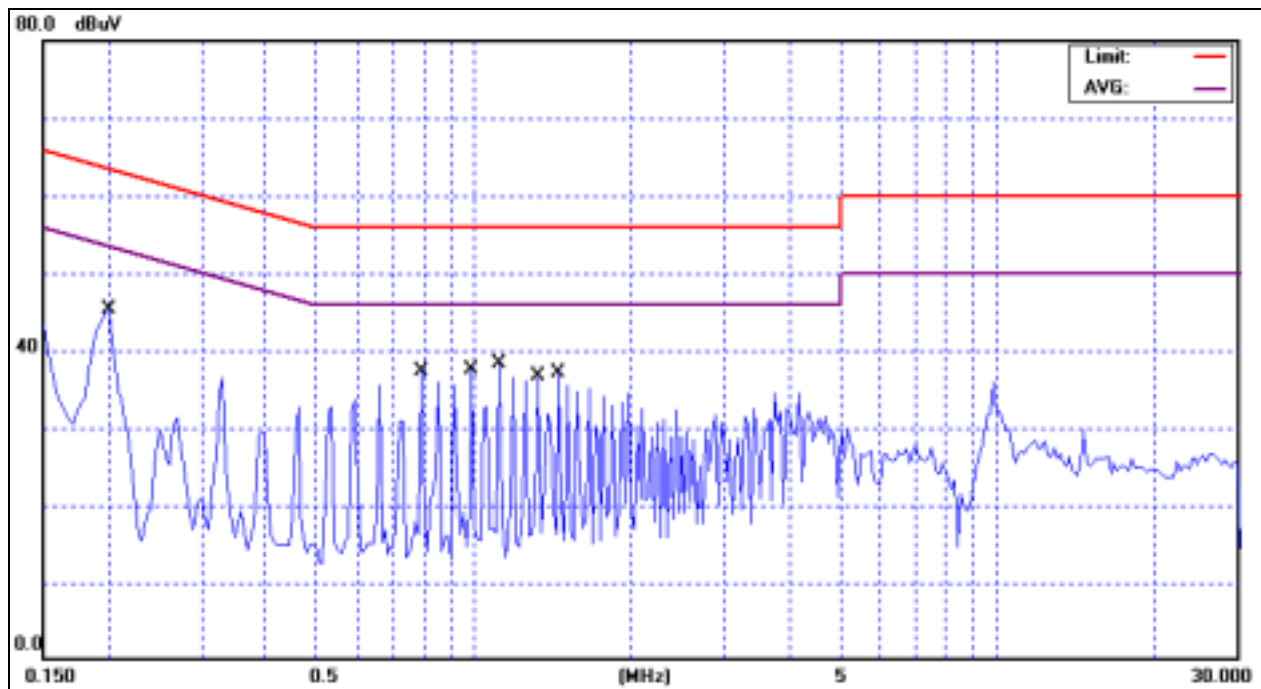

5. RADIATED EMISSION MEASUREMENT

5.1 TEST EQUIPMENT

The following test equipments are used during the radiated emission tests:

Radiated emission measurement was performed at: Site #1 Site #2 Site #3 Site #4

Item	Instrument	Manufacturer	Model	Serial No.	Last Cal. Date
1	Test Receiver	R & S	ESCS30	100035	06/10/04
2	Spectrum Analyzer	ADVANTEST	R3172	150101278	03/15/05
3	Pre-Amplifier	HP	8447D	2944A08272	10/09/04
4	BILOG Antenna	SCHAFFNER	CBL6112B	2580	11/30/04
5	RF Cable	GTK	N/A	GTK-E-A152-01	12/29/04
6	Open Site	GTK	N/A	B2	11/23/04


Note: All equipment upon which need to calibrated are with calibration period of 1 year.

5.2 TEST SETUP

5.2.1 BLOCK DIAGRAM OF CONNECTIONS BETWEEN EUT AND SIMULATORS

Note: This is a reprehensive setup diagram for Table-top EUT.


For Floor-standing EUT, the table will be removed with all others setup condition remain the same.

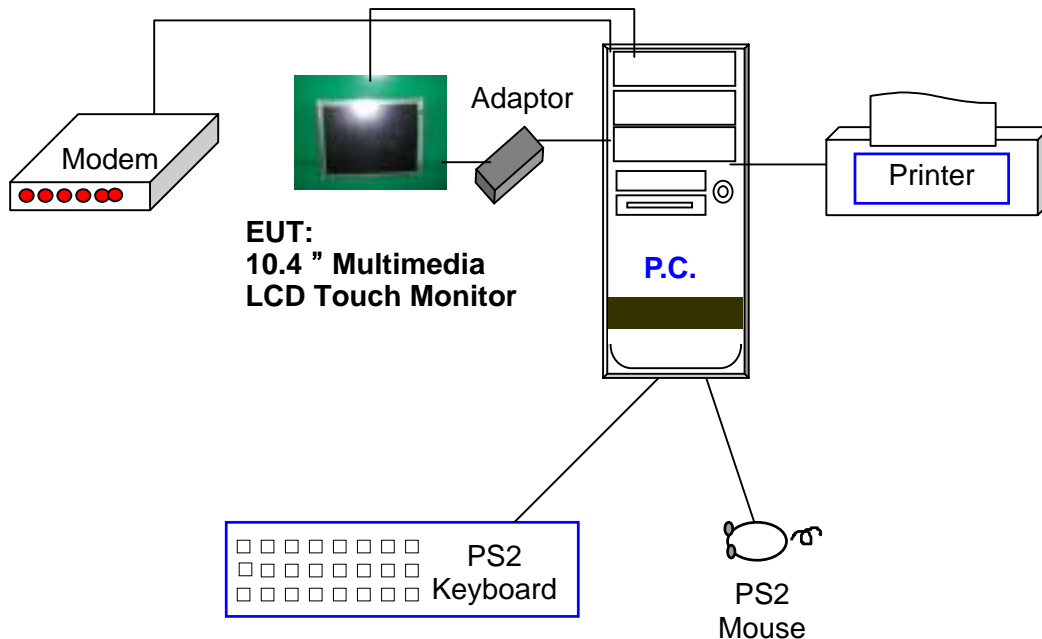

5.3 OPEN TEST SITE SETUP DIAGRAM

Note: This is a comprehensive setup diagram for Table-top EUT.

For Floor-standing EUT, the table will be removed with all others setup condition remain the same.

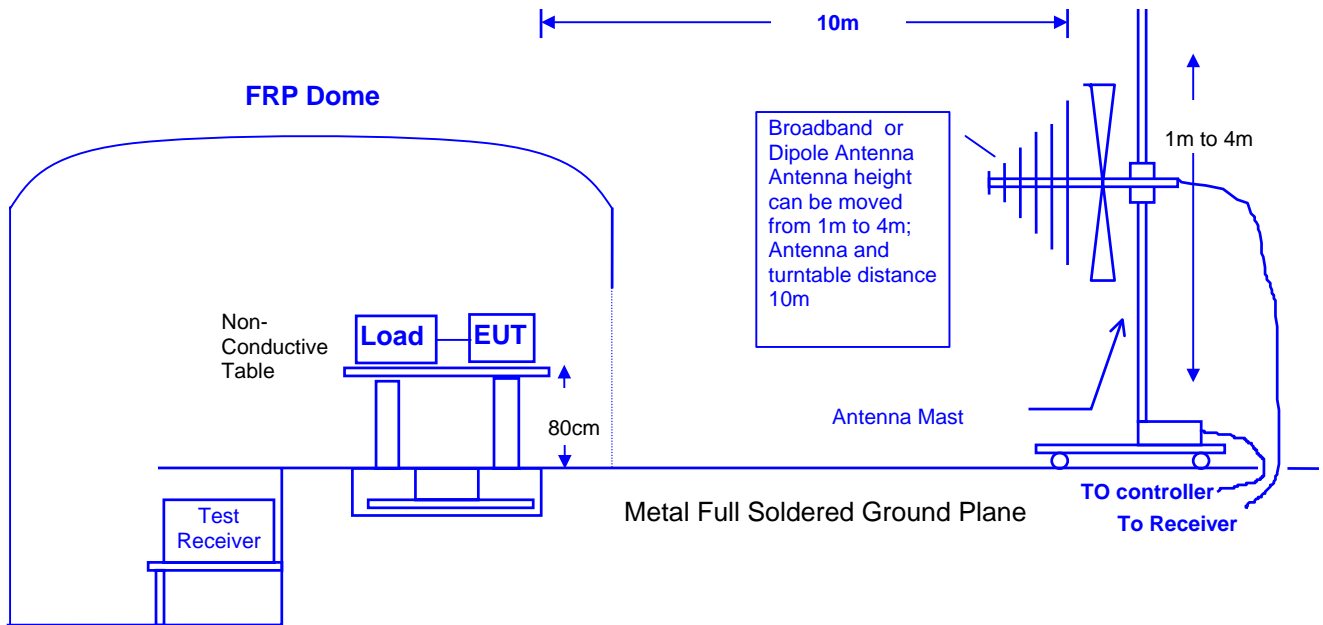

5.4 RADIATED EMISSION LIMIT

FCC Class B Limit at 3m

Frequency	Distance	Field Strength	
		$\mu\text{V/m}$	$\text{dB}\mu\text{V/m}$
MHz	Meter		
30 to 88	3	100	40.0
88 to 216	3	150	43.5
216 to 960	3	200	46.0
Above 960	3	500	54.0

Note: The frequencies above 1000MHz, as measured using instrumentation with a peak detector function was corresponding to 20dB above the maximum permitted average limit.

(Refer 47CFR Ch. 1 (10-1-98 Edition §15.35(b))

FCC Class A Limit at 10m

Frequency	Distance	Field Strength	
		$\mu\text{V/m}$	$\text{dB}\mu\text{V/m}$
MHz	Meter		
30 to 88	10	90	39.0
88 to 216	10	150	43.5
216 to 960	10	210	46.4
Above 960	10	300	49.5

Remark :1. The tighter limit shall apply at the edge between two frequency bands.

2. Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.

☒ **CISPR Class B Limit at 10m**

Frequency	Distance	Field Strength
MHz	Meter	dB(μV/m)
30 to 230	10	30
230 to 1000	10	37

Remark :1. The tighter limit shall apply at the edge between two frequency bands.

2. Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.

5.5 EUT CONFIGURATION

The equipment which is listed 5.1 are installed on Radiated Emission Test to meet the Commission requirement and operating in a manner which tends to maximize its emission characteristics in a normal application.

The device under test, installed in a representative system as described in section 5.2.2, was placed on a non-conductive table whose total height equaled 80 cm. This table can be rotated 360 degree. The measurement antenna was mounted to a non-conductive mast capable of moving the antenna vertically. Antenna height was varied from 1 meter to 4 meters and the system under test was rotated from 0 degree through 360 degrees relative to the antenna position and polarization (Horizontal and Vertical). Also the I/O cable position was investigated to find the maximum emission condition.

5.6 OPERATING CONDITION OF EUT

Same as section 4.6.

5.7 RADIATED EMISSION DATA

The measurement range of radiated emission, which is from **30 MHz to 1 GHz**, was investigated. All readings are quasi-peak values with a resolution Bandwidth of 120 KHz. The initial step in collecting radiated emission data is a spectrum analyzer peak scans of the measurement range for all the test modes and then use test receiver for final measurement. Then the worst modes were reported the following data pages.


5.8 RADIATED EMISSIONS MEASUREMENT RESULTS

Date of Test	May 09, 2005	Temperature	26 deg/C
EUT	10.4 " Multimedia LCD Touch Monitor	Humidity	56 %RH
Working Cond.	Mode 1	Display Pattern	H Pattern
Antenna distance	10m at Horizontal	Frequency Range	30-1000MHz

No.	Frequency MHz	Reading Level dBμV	Factor dB	Measurement dBμV/m	Limit dBμV/m	Over Limit dB	Detector
1	38.2	34.3	-10.22	24.08	30	-5.92	QP
2	48.777	38.3	-15.26	23.04	30	-6.96	QP
3	59.411	41.5	-18.91	22.59	30	-7.41	QP
4	73.734	41.8	-18.6	23.2	30	-6.8	QP
5	84.294	42.5	-17.83	24.67	30	-5.33	QP
6	144.5	38	-12.81	25.19	30	-4.81	QP
7	173.27	33	-14.15	18.85	30	-11.15	QP
8	238.647	35.6	-11.15	24.45	37	-12.55	QP
9	362.728	32	-6.38	25.62	37	-11.38	QP
10	480.059	31.5	-4.34	27.16	37	-9.84	QP
11	625.014	28.6	-1.92	26.68	37	-10.32	QP
12	737.423	28.9	-0.33	28.57	37	-8.43	QP

Remarks:

1. All Readings below 1GHz are Quasi-Peak.
2. Emission Level= Reading + Factor (Could have ±0.01 tolerance due to computer automatically round off calculation).
3. Over Limit (Margin Value)=Measurement level-Limit value.
4. The " " means this data is worst-case Measurement level.

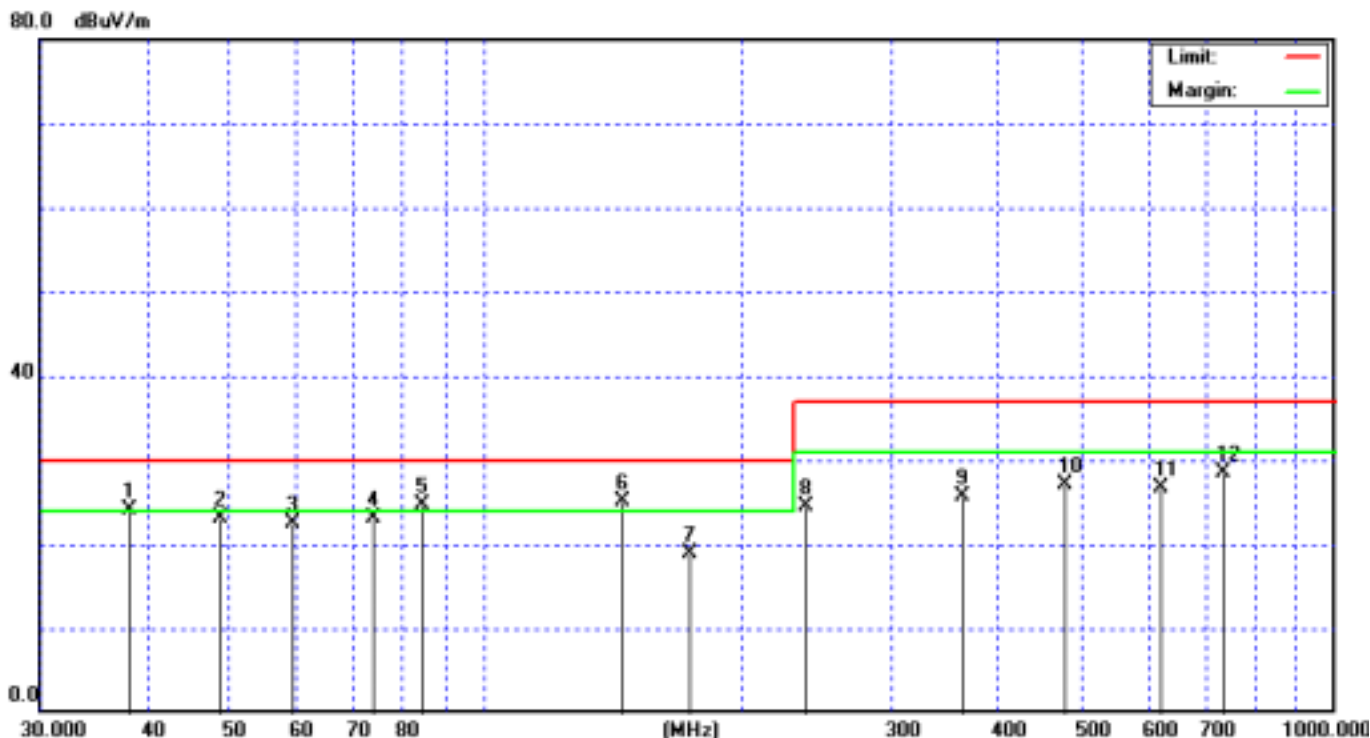


Date of Test	May 09, 2005	Temperature	26 deg/C
EUT	10.4 " Multimedia LCD Touch Monitor	Humidity	56 %RH
Working Cond.	Mode 1	Display Pattern	N/A
Antenna distance	10m at Vertical	Frequency Range	30-1000MHz

No.	Frequency MHz	Reading Level dBμV	Factor dB	Measurement dBμV/m	Limit dBμV/m	Over Limit dB	Detector
1	38.23	35.1	-10.23	24.87	30	-5.13	QP
2	48.746	40.3	-15.23	25.07	30	-4.93	QP
3	56.256	41.2	-18.03	23.17	30	-6.83	QP
4	71.896	41.3	-18.77	22.53	30	-7.47	QP
5	144.5	36.8	-12.81	23.99	30	-6.01	QP
6	393.29	35.4	-5.7	29.7	37	-7.3	QP
7	417.87	31.5	-5.45	26.05	37	-10.95	QP
8	480.059	32.5	-4.34	28.16	37	-8.84	QP
9	487.527	33	-4.42	28.58	37	-8.42	QP
10	551.85	32.5	-3.19	29.31	37	-7.69	QP
11	981.12	25.8	3.87	29.67	37	-7.33	QP

Remarks:


1. All Readings below 1GHz are Quasi-Peak.
2. Emission Level= Reading + Factor (Could have ±0.01 tolerance due to computer automatically round off calculation).
3. Over Limit (Margin Value)=Measurement level-Limit value.
4. The " " means this data is worst-case Measurement level.

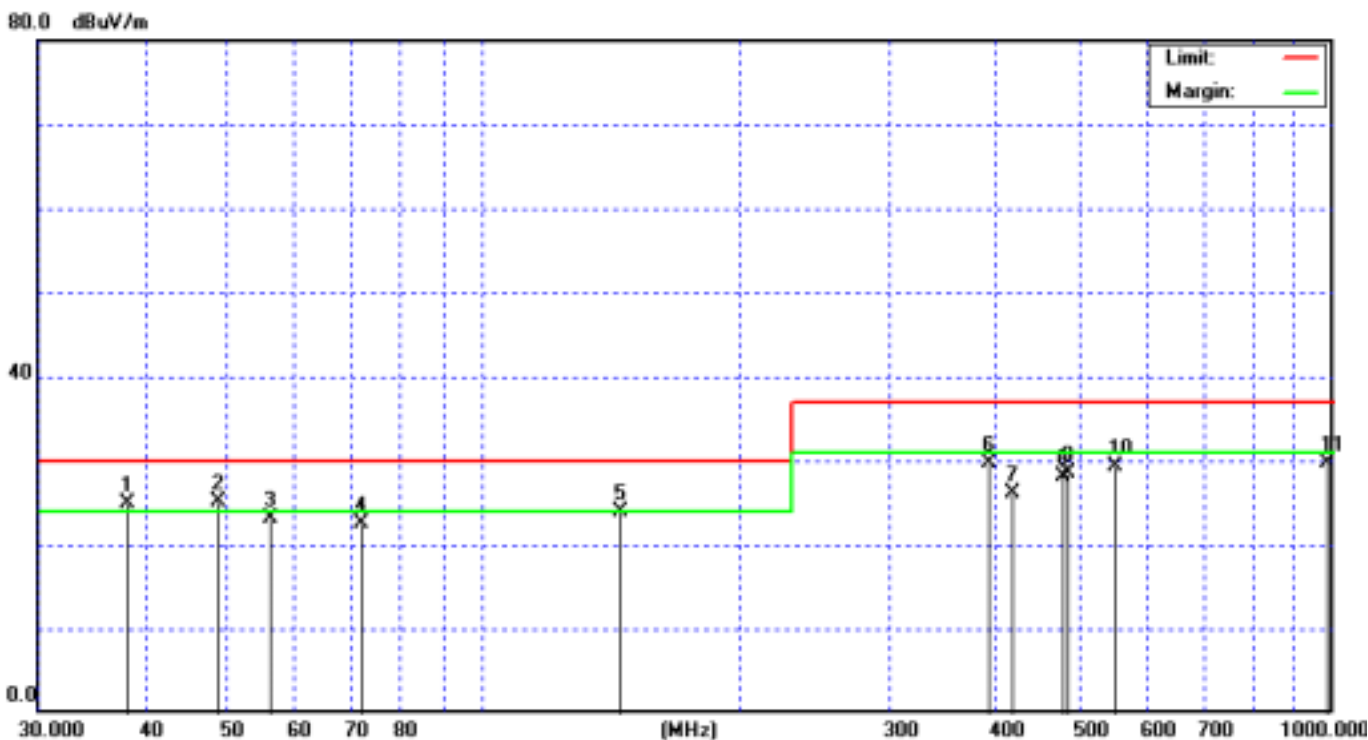

6. PHOTOGRAPHS FOR TEST

6.1 TEST PHOTOGRAPHS FOR CONDUCTION

Mode 1

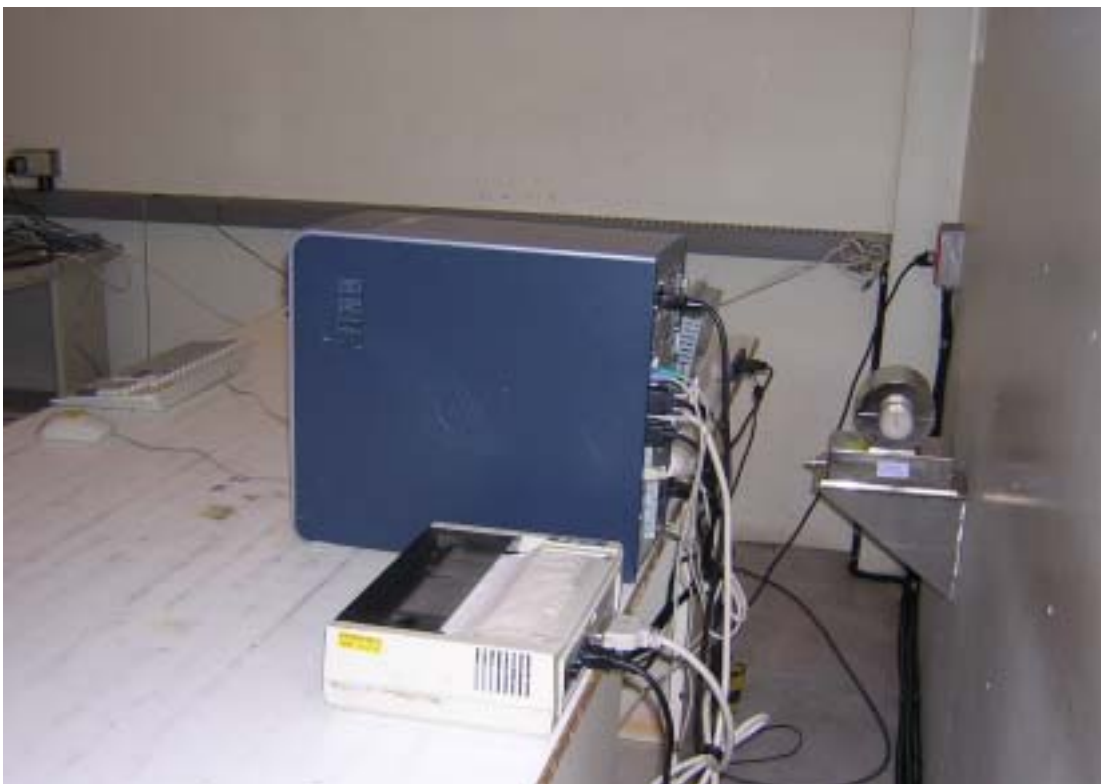

6.2 TEST PHOTOGRAPHS FOR RADIATED

Mode 1



7. PHOTOGRAPHS FOR PRODUCT

1. Front View Of 10.4 " Multimedia LCD Touch Monitor (EUT)
2. Back View Of 10.4 " Multimedia LCD Touch Monitor (EUT)



- 3. Front View Of Adaptor
- 4. Back View Of Adaptor



8. EMI REDUCTION METHOD DURING COMPLIANCE TESTING

No modification was made during testing.

Appendix A

Circuit (Block) Diagram

(Shall be added by Applicant)

Appendix B

User Manual

(Shall be added by Applicant)